



S2261HP

3 NEEDLE CHAIN STITCH
FEED OFF THE ARM UNIT



[view more](#) 





S2261HP

3 NEEDLE CHAIN STITCH FEED OFF THE ARM UNIT

The strongest and most precise feed off the arm unit for denim is now part of the new Vi.Be.Mac. S line. Produced in Vi.Be.Mac. China facility, in full respect of VBM quality and performance standards. The S2261HP is feed off the arm unit 3 needle chain stitch, for double lap seaming on jeans, work clothes and denim clothes in general. This machine is particularly suitable to sew back yoke, back rise, inseam and out seams, plus top stitch operations. In terms of productivity, S2261HP can work at 4999 rpm thanks to several outstanding features, like oil feeding lubrication, puller device and a special sensor for the dynamic pressure presser foot control (DCP system, PATENTED). The above mentioned DCP system avoids all the skip stitching troubles also on the crotch double thickness, the most critical point for every feed off the arm machine existing in the market.



FAST



QUALITY



OPERATOR
FRIENDLY

FEATURES

- **Zeromax puller:** for fast feeding and perfect matching
- **DCP (Dynamic Control Pressure):** patented technology
- **Large range of needle gauges available**
- **New cutting system:** high precision and long lasting
- **New design of the stand:** with a special cylinder inside the column that makes machine floating for easy adjustment in height

OPTIONAL

- **Needle gauges (3 needles):** 9/32" (7.2 mm) - 5/16" (8 mm) - 3/8" (9.5 mm) - 3/8" (1/4" + 1/8")
- **Needle gauges (2 needles):** 3/16" (4.8 mm) - 7/32" (5.6 mm)


Max Sewing Speed	Stitching Length	Standard Needle Gauge
4999 rpm	from 0.9 to 4.5 mm	1/4" (6.4 mm)
Sewing Head	Power Requirement	Air Consumption
Vi.Be.Mac. 3 needle CS	220 V Single-Phase 50/60 Hz	3 L/min

The accessories described here may not be included in the price of the machine. Please refer to the commercial documents for information on prices and conditions.

Dynamic Control Pressure DCP

Zeromax puller

Cutting system

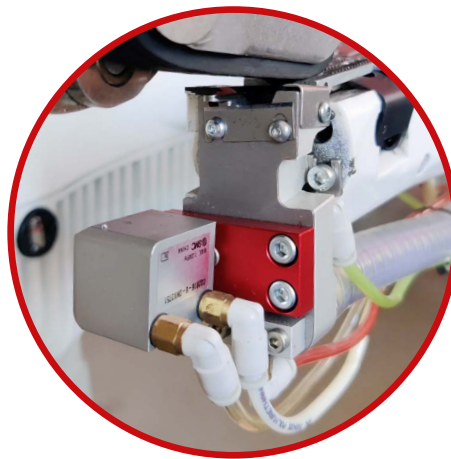

DCP (Dynamic Control Pressure)

Thanks to a special sensor the skip stitching troubles also on double thickness (crotch) are avoided



Cutting system

The single pneumatic cutting system allows to reduce air consumption and blade wear



Zeromax puller

The special puller grants very fast feeding and perfect matching between the sewn parts

FOLLOW US



CONTACT US



VI.BE.MAC. S.p.A.

Società soggetta a direzione e coordinamento di Jack Europe S.à.r.l.

Via Monte Pastello, 7/i - 37057 San Giovanni Lupatoto (VR), Italy

vibemac@vbm-grp.com - sales@vbm-grp.com - customer-care@vbm-grp.com

Tel. [+39 045 8778151](tel:+390458778151) / [8778152](tel:+390458778152)



www.vibemac.com

