

M900neo

New trend with



New trend with
M900neo
DP22 Series DP32 Series



PEGASUS CO., LTD.

5-7-2 Sagisu Fukushima-ku, Osaka 553-0002 Japan
TEL : +81-6-6458-4739 FAX : +81-6-6454-8785



-Specifications and appearance are subjected to changes without notice.
-Read the instruction manual before operating the machine to ensure safe usage.
-Photos for illustration purpose. They may not represent actual operating conditions and/or displayed optional parts.

© 2025 PEGASUS CO., LTD. Catalog NO.103303 May 2025

New trend with
M900 neo

DP22 Series DP32 Series

Built-in Electronic Equipment
Integrated Type

Safety Stitch Machines / Overlock



DP32 Series



DP22 Series

Built-in Direct Drive Motor
Integrated operation panel and control box

Built-in Electronic Equipment Integrated Type

Safety Stitch Machines / Overlock

neo



New

trend with

Intelligently integrated
Smart & Stylish!

Ready to Sew Right Out of the Box

With the sewing machine body integrated with a direct drive motor, control box. And operation panel, setup time and effort are greatly reduced.

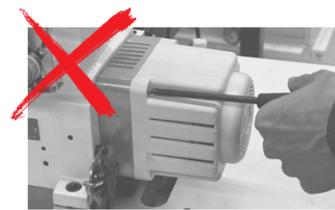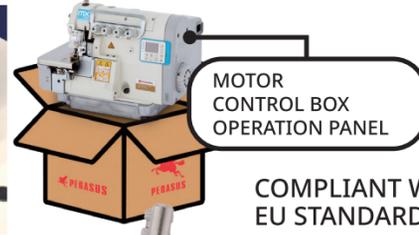

MOTORS AND OTHER DEVICES
NO SETUP REQUIRED

**OUT OF THE BOX
OO TB**

COMPLIANT WITH
EU STANDARDS.

Max. sewing speed
6,500 sti/min



Block oil stain!
**Block oil
Stain!**
Protects your sewn
products from
oil contamination.




Smart Devices Supporting Reliable Sewing



Three safety sensors **DP32**

If any part of the machine is not properly set, the sensors detect the issue and prevent operation. This prevents malfunctions, ensures operator safety, and avoids machine trouble.

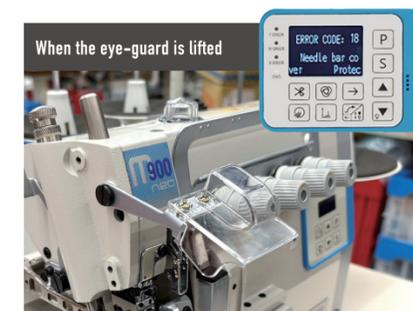

Multilingual **DP32** Operation Navigation


Multilingual voice-guided operation panel ensures smooth use and friendly.

Voice guidance
(8languages)
ENGLISH, CHINESE, TURKISH, SPANISH, BENGALI,
VIETNAMESE, PORTUGUESE, INDOONESIAN



Energy Saving &
Reduced
Air Consumption

Dual fabric sensors **DP32**

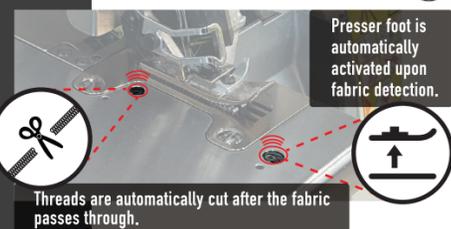

Presser foot is automatically activated upon fabric detection.

Threads are automatically cut after the fabric passes through.

LED light **DP32** **USB PORT**




Cool tones

Warm Tones

※DP22 model only supports one color tone.



Air saving **DP32** Air is activated only when needed — such as during fabric or thread trimming.

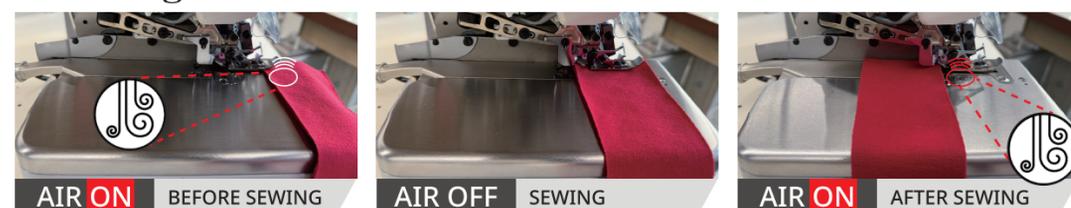

This reduces overall air consumption, helping to lower energy costs for the entire factory and contributing to environmental conservation and cost savings.

					KS	KH	AT	SC		PL	LC
		MULTILINGUAL SUPPORT	SENSOR	LED LIGHT	VERTICAL TYPE VACUUM THREAD CHAIN CUTTER	FLAT TYPE VACUUM THREAD CHAIN CUTTER	AUTOMATIC TAPE CUTTER	NEEDLE THREAD RELEASING DEVICE	AIR SAVING	PRESSER FOOT LIFTER	PNEUMATIC LINT COLLECTOR
DP22	M932										
	M952										
	M922										
DP32	M932										
	M952	KH8A									
		KS8A									
	M952	KH8D									
		KH8E									
		KS8D									
	M952	KS8E									
AT8G											
M932	AT6G										
M922	AT6G										

※ Standard included

Built-in Electronic Equipment Integrated Type

Safety Stitch Machines / Overlock

M900-A/DP22 Series subclass specifications



Application	Fabric weight	Subclass	Number of needles	Number of threads	Needle space (mm)	Overedge width (mm)	Max. main feed dog's movement amount (mm)	Diff. feed ratio	Presser foot lift (mm)	Max. sewing speed (stitches/minute)	Remarks
Plain seaming	Medium	M932-A-38/DP22	2	5	3	4	3.7	0.7-1.7 See Note 1	5.5	6500	
	Medium	M932-A-44/DP22	2	5	3	4	3.7	0.7-1.7 See Note 1	5.5	6500	
	Medium	M932-A-70/DP22	2	5	5	5	3.7	0.7-1.7 See Note 1	5.5	6500	
	Heavy	M932-A-86/DP22	2	5	5	6	5.3	0.6-1.3	5.5	5500	With caterpillar foot, for jeans
	Extra-heavy	M932-A-86H/DP22	2	5	5	6	5.3	0.6-1.3	7.0	5500	With caterpillar foot, for jeans
Shirring	Light-medium	M932-A-48/DP22	2	5	3	4	3.3	1-2.8	5.5	5500	KH8A is not applicable
Shirring with piping	Light-medium	M932-A-48P2/DP22	2	5	3	4	3.3	1-2.8	5.0	5000	KH8A is not applicable
3-needle versatile machine for plain seaming	Medium	M932-A-355/DP22	3	6	3+2	4	3.7	0.7-1.7 See Note 1	5.5	6000	Available in 401,401+514,514,514,504
	Medium	M932-A-551/DP22	3	6	5+2.5	3.5	3.7	0.7-1.7 See Note 1	5.5	6000	For U-shaped tape KH8A is not applicable

M952-A/DP22

Blindstitch hemming	Light-medium	M952-A-01/DP22	1	3	-	4	3.7	0.7-1.7 See Note 1	5.5	6500	
Plain seaming	Light-medium	M952-A-13/DP22	2	4	2	4	3.7	0.7-1.7 See Note 1	6	6500	With presser foot for attaching tape
						5					
Plain seaming	medium-heavy	M952-A-13H/DP22	2	4	2	4	3.7	0.7-1.7 See Note 1	6	6000	With presser foot for attaching tape Overedge width 7mm KH9K is applicable
						5					
Turn down hemming	Light	M952-A-16S2/DP22	1	3	-	1.5	3.7	0.7-1.7 See Note 1	5.5	6500	
						4					
Plain seaming	Light-medium	M952-A-17/DP22	1	3	-	4	3.7	0.7-1.7 See Note 1	5.5	6500	
						4					
	Extra-heavy	M952-A-23B/DP22	2	4	2.5	4.5	2.7	1.2-3.5	7	6500	
Plain seaming	Light-medium	M952-A-52/DP22	2	4	2	3	3.7	0.7-1.7 See Note 1	6	6500	With presser foot for attaching tape
						4					
						5					
medium-heavy	M952-A-52H/DP22	2	4	2	4	3.7	0.7-1.7 See Note 1	6	6000	With presser foot for attaching tape	
					5						
Butt-end sewing	Light-medium	M952-A-90/DP22	1	2	-	6	6.2	1	3	5000	KS8A is not applicable
Backlatching	Light-medium	M952-A-180/DP22	1	3	-	4	3.7	0.7-1.7 See Note 1	5.5	6500	Backlatching (BT9B)

M922-A/DP22

Attaching tape	Light-medium	M922-A-02/DP22	2	4	5	-	3.7	0.7-1.7 See Note 2	3.5	6000	
----------------	--------------	----------------	---	---	---	---	-----	-----------------------	-----	------	--

M900-A/DP32 Series subclass specifications



Application	Fabric weight	Subclass	Number of needles	Number of threads	Needle space (mm)	Overedge width (mm)	Max. main feed dog's movement amount (mm)	Diff. feed ratio	Presser foot lift (mm)	Max. sewing speed (stitches/minute)	Remarks
Plain seaming	Medium	M932-A-38/DP32	2	5	3	4	3.7	0.7-1.7 See Note 1	5.5	6500	
	Medium	M932-A-44/DP32	2	5	3	4	3.7	0.7-1.7 See Note 1	5.5	6500	
	Medium	M932-A-70/DP32	2	5	5	5	3.7	0.7-1.7 See Note 1	5.5	6500	
	Heavy	M932-A-86/DP32	2	5	5	6	5.3	0.6-1.3	5.5	5500	With caterpillar foot, for jeans
	Extra-heavy	M932-A-86H/DP32	2	5	5	6	5.3	0.6-1.3	7.0	5500	With caterpillar foot, for jeans
3-needle versatile machine for plain seaming	Medium	M932-A-355/DP32	3	6	3+2	4	3.7	0.7-1.7 See Note 1	5.5	6000	Available in 401,401+514,514,514,504
	Medium	M932-A-551/DP32	3	6	5+2.5	3.5	3.7	0.7-1.7 See Note 1	5.5	6000	For U-shaped tape

M952-A/DP32

Plain seaming	Light-medium	M952-A-13/DP32	2	4	2	4	3.7	0.7-1.7 See Note 1	6	6500	With presser foot for attaching tape
						5					
Plain seaming	medium-heavy	M952-A-13H/DP32	2	4	2	4	3.7	0.7-1.7 See Note 1	6	6000	With presser foot for attaching tape
						5					
Turn down hemming	Light	M952-A-16S2/DP32	1	3	-	1.5	3.7	0.7-1.7 See Note 1	5.5	6500	
						4					
Plain seaming	Light-medium	M952-A-17/DP32	1	3	-	4	3.7	0.7-1.7 See Note 1	5.5	6500	
						4					
Extra-heavy	M952-A-23B/DP32	2	4	2.5	4.5	2.7	1.2-3.5	7	6500		
											4
Plain seaming	Light-medium	M952-A-52/DP32	2	4	2	3	3.7	0.7-1.7 See Note 1	6	6500	With presser foot for attaching tape
						4					
						5					
medium-heavy	M952-A-52H/DP32	2	4	2	4	3.7	0.7-1.7 See Note 1	6	6000	With presser foot for attaching tape	
					5						
Butt-end sewing	Light-medium	M952-A-90/DP32	1	2	-	6	6.2	1	3	5000	

M922-A/DP32

Attaching tape	Light-medium	M922-A-02/DP32	2	4	5	-	3.7	0.7-1.7 See Note 2	3.5	6000	
----------------	--------------	----------------	---	---	---	---	-----	-----------------------	-----	------	--

Note 1) If you use the machine with a differential feed ratio of more than 1:1.7, the main feed dog's movement amount should be less than 2.9 mm.

(The maximum differential feed ratio is 1:2. If you use the machine with the maximum differential feed ratio, the upper limit reading for the differential feed ratio adjustment lever is 6.)

Note 2) Differential feed ratio 1:2 is available with maximum main feed dog movement amount at 2.9mm. Reading 6 is the upper limit for the differential feed adjusting lever with main feed dog movement amount at 2.9mm.

Note 3) For DP32, install either KH8D, KH8E, AT6G, AT8G.